



Gastronorm Fridge Counters

SPI-7-135-20-NS / SPI-7-180-30-NS / SPI-7-225-40-NS

2 Years Parts & Labour Warranty

2-3 Working Days Delivery


UK Service Support

Manufactured In Europe



The Sterling Pro Green SPI-7 refrigerated counter range with plain tops are 2, 3 and 4 door units with a heavy-duty forced air system, allowing them to perform in the busiest of commercial environments. Manufactured in Europe and made from Stainless Steel, these reliable units feature rounded interior edges, ergonomically built in handles, hinged doors with automatic closing, removable magnetic door gaskets and an environmentally friendly R290a refrigerant. Drawer options are available on request.

Model	Doors	Gross & Nett Capacity		Temperature Range	Energy Consumption	Energy Rating	Dimensions (mm)		
SPI-7-135-20-NS	2	290 ltrs	143 ltrs	-2°C to +8°C	1019 kWh/year	C	W1342	D700	H850
SPI-7-180-30-NS	3	452 ltrs	214 ltrs	-2°C to +8°C	1119 kWh/year	C	W1792	D700	H850
SPI-7-225-40-NS	4	615 ltrs	285 ltrs	-2°C to +8°C	1919 kWh/year	E	W2242	D700	H850

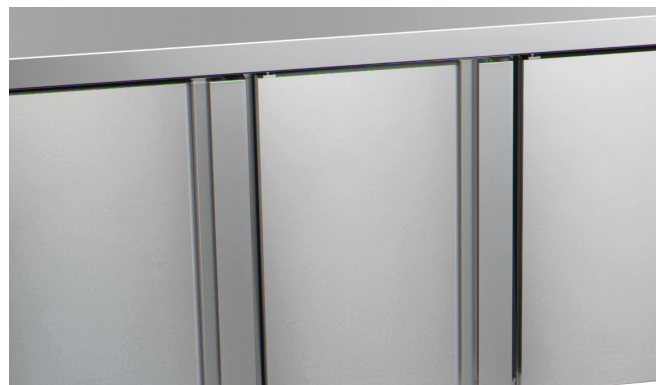

Gastronorm Fridge Counters

SPI-7-135-20-NS / SPI-7-180-30-NS / SPI-7-225-40-NS



Range Specifications			
	SPI-7-135-20-NS	SPI-7-180-30-NS	SPI-7-225-40-NS
GTIN Code	5060750321164	5060750321195	5060750321218
Dimensions	W1342 x D700 x H850mm	W1792 x D700 x H850mm	W2242 x D700 x H850mm
Packed Dimensions	W1455 x D825 x H1085mm	W1910 x D825 x H1085mm	W2353 x D825 x H1085mm
Gross/Nett Capacity	290 Litres / 143 Litres	452 Litres / 214 Litres	615 Litres / 285 Litres
Doors	2	3	4
Grid Level Positions	6	6	6
Grid Dimensions	Fits GN1/1	Fits GN1/1	Fits GN1/1
Exterior Finish	Stainless Steel	Stainless Steel	Stainless Steel
Interior Finish	Stainless Steel	Stainless Steel	Stainless Steel
Temperature Range	-2°C to +8°C	-2°C to +8°C	-2°C to +8°C
Max Ambient	+30°C	+30°C	+30°C
Refrigerant	R290a	R290a	R290a
Insulation Thickness	50mm	50mm	50mm
Insulation Type	Polyurethane	Polyurethane	Polyurethane
Gross Weight	118kg	123kg	174kg
Energy Rating	C	C	E
Climate Class	4	4	4
Energy Consumption	Annually: 1019 kWh	Annually: 1119 kWh	Annually: 1919 kWh
Power Supply	13 amp single phase plug	13 amp single phase plug	13 amp single phase plug
Voltage	230V/50HZ	230V/50HZ	230V/50HZ
Cooling System	Ventilated	Ventilated	Ventilated
Defrost Type	Automatic	Automatic	Automatic
Self Closing Doors	Yes	Yes	Yes
Reversible Doors	No	No	No
Lighting	No	No	No
Lockable	No	No	No
Castors	Yes	Yes	Yes
Frost Free	No	No	No