



Undermounted Counters

SPU205AS / SPU305AS

1 Year Parts & Labour Warranty


2-3 Working Days Delivery

UK Service Support



The Sterling Pro Cobus SPU205AS (2 door) and SPU305AS (3 door) counter range keeps fresh ingredients safely chilled with minimal cost. Its compact design makes it ideal for smaller catering spaces or anywhere needing extra storage and prep capacity. Featuring thicker doors, double door gaskets for better cooling, and a curved hand grip, this A-rated range uses the most efficient eco-friendly refrigerant to minimise running costs, while the catering-grade stainless steel construction ensures hygienic food preparation.

Model	Doors	Gross & Nett Capacity		Temperature Range	Insulation Thickness	Refrigerant	Energy Rating	Dimensions (mm)		
SPU205AS	x2	240 ltrs	180 ltrs	+2°C to +8°C	35mm	R600a	A	W903	D700	H897
SPU305AS	x3	368 ltrs	219 ltrs	+2°C to +8°C	35mm	R600a	A	W1368	D700	H897

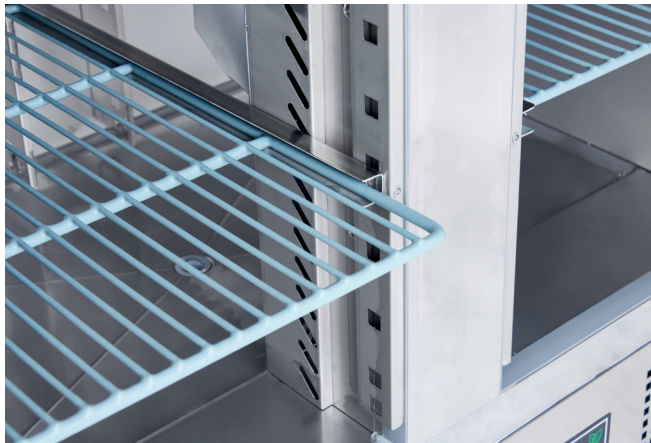

Undermounted Counters

SPU205AS / SPU305AS

Range Specifications		
	SPU205AS 2 Door Undermounted Counter	SPU305AS 3 Door Undermounted Counter
GTIN Code		
Dimensions	W903 x D700 x H897mm	W1368 x D700 x H897mm
Internal Dimensions	W830 x D595 x H455mm	W1295 x D595 x H455mm
Packed Dimensions	W930 x D730 x H1050mm	W1390 x D740 x H1050mm
Gross Capacity	240 Litres	368 Litres
Nett Capacity	180 Litres	219 Litres
Doors	2	3
Shelves Supplied	2	3
Exterior Finish	SS201 Stainless Steel	SS201 Stainless Steel
Interior Finish	SS201 Stainless Steel	SS201 Stainless Steel
Temperature Range	+2°C to +8°C	+2°C to +8°C
Max Ambient	32°C	32°C
Refrigerant	R600a	R600a
Insulation Thickness	35mm	35mm
Gross Weight	88kg	116kg
Nett Weight	81kg	104kg
Energy Rating	A	A
Climate Class	4	4
Power Supply	13 amp single phase plug	13 amp single phase plug
Voltage	220-240V/50HZ	220-240V/50HZ
Cooling System	Static cooling with fan	Static cooling with fan
Defrost Type	Automatic	Automatic
Reversible Doors	No	No
Self-Closing Door	No	No
Lighting	No	No
Lockable	No	No
Castors	No	No
Frost Free	No	No
Compressor Code	SZ100CY1	SZ100CY1