



Proud Supplier of Commercial Refrigeration
to the Catering Equipment Industry

Uprights & Counters



Storage Refrigeration



Display Refrigeration



Contact

Website: www.sterlingpro.co.uk / Phone: 01264 560190 / Email: sales@sterlingpro.co.uk



Introduction

Sterling Pro has been a proud supplier of commercial refrigeration to the catering equipment industry for 11 years. Since our inception we have carefully created a range of high quality and relevant products that meet the demands of modern caterers and retailers.

A well respected favourite of refrigeration engineers, our range consists of a full range of gastronom uprights and counters as well as front of house display chillers, serve-over and patisserie counters. Our front of house refrigeration is stylish and functional and allows us to provide a full solution for gastro pubs. It can be found in a wide range of sites, from large chains to small coffee shops.

Our European built Sterling Pro Green Line delivers both functionality and style to your kitchen and front of house. Sterling Pro always puts functionality at the forefront and so usability is important during our design process. For our Gastronom range the nylon-coated shelves make cleaning a simple process, saving time and effort. Easy-fit magnetic gaskets on all cabinets and counters allow for effortless replacement, increasing hygiene and efficiency. A stamped bottom plate and full length handles further improves hygiene by removing the chance for grease and dirt to collect. The lower operating temperature of the Hydrocarbon refrigerants creates lower heat and noise

emissions, improving the comfort of the workplace and extending the life of the compressor. Our range of chest freezers are multi functional, they can of course be used as a freezer but also have the option to operate as a chiller or fridge. This function can be switched by the user and means your equipment will continue to work for you even if the profile of the products you are storing changes.

Sterling Pro Vantage builds on all the highlights from the green range and takes our Gastronom offering to the next level. Climate class 5 means that it will easily cope in even the hottest working environments. It also comes highly recommended for very busy environments where frequent opening of doors can cause lesser refrigeration to struggle. The focus on achieving top climate class doesn't mean that energy efficiency has been forgotten; the XPI700 refrigerator achieves the highest A rating under the conditions defined in climate class 5. European built, every component is specially selected to ensure optimum reliability and efficiency. More detailed information can be found [here](#). At Sterling Pro we believe that quality refrigeration does not need to be proven by an inflated price tag and our Vantage range is no exception; this premium range of refrigeration offers excellent value and is very attractively priced when compared to its peers in the marketplace.



Contents

Click on any of the options below to be taken directly to your range of choice.
Click on any of the Sterling Pro logo's to return back to this page.

Gastronorm Fridge Counters	3-4
Gastronorm Freezer Counters	5-6
Pizza Prep Counters	7-10
Fish Storage Cabinets	11-12
Single Door Gastronorm Cabinets	13-19
Double Door Gastronorm Cabinets	20-26

Chest Freezers	27
Bottle Coolers	28-30
Display Chillers & Freezers	31-34
Patisserie Counters	35-36
Serveovers	37-40
Multidecks	41



Contact

Website: www.sterlingpro.co.uk / Phone: 01264 560190 / Email: sales@sterlingpro.co.uk



Green Gastronorm Refrigerator Counters
SPI-7-135-20 / SPI-7-180-30 / SPI-7-225-40



2 YEARS
WARRANTY



2-3 DAY
DELIVERY



UK SERVICE
SUPPORT



MADE IN
THE EU



Specifications

Model	Doors	Upstand	Capacity Gross / Nett		Temperature	Energy Usage	Dimensions (mm) Width / Depth / Height			Energy Rating	Refrigerant	List Price
SPI-7-135-20	2	Yes	290 ltrs	143 ltrs	-2°C to +8°C	2.0 kW/hr	1342	700	850	B	R600a	£1,650
SPI-7-135-20-SP	2	No	290 ltrs	143 ltrs	-2°C to +8°C	2.0 kW/hr	1342	700	850	B	R600a	£1,650
SPI-7-180-30	3	Yes	452 ltrs	214 ltrs	-2°C to +8°C	2.6 kW/hr	1792	700	850	C	R600a	£1,870
SPI-7-180-30-SP	3	No	452 ltrs	214 ltrs	-2°C to +8°C	2.6 kW/hr	1792	700	850	C	R600a	£1,870
SPI-7-225-40	4	Yes	615 ltrs	285 ltrs	-2°C to +8°C	3.0 kW/hr	2242	700	850	C	R600a	£2,298
SPI-7-225-40-SP	4	No	615 ltrs	285 ltrs	-2°C to +8°C	3.0 kW/hr	2242	700	850	C	R600a	£2,298

Key Features

Power supply: 13 amp plug

Castors fitted as standard

Heavy-duty forced air system

Stainless Steel interior and exterior

Automatic defrost

Intelligent air-circulation system

Drawer options available

100mm upstand available at no extra cost

Green Gastronorm Refrigerator Counters SPI-7-135-20 / SPI-7-180-30 / SPI-7-225-40



2 YEARS
WARRANTY



2-3 DAY
DELIVERY



UK SERVICE
SUPPORT



MADE IN
THE EU

Efficiency

- "Ventilation Grill" on the front panel keeping the cooling unit system ventilated and running more efficiently.
- Forced draft evaporator with anti-corrosion cover.
- Intelligent Air Circulation system ensures perfect temperature consistency with its innovative airflow design.
- 50 mm thickness, CFC-free, high-density (40 kg/m³) polyurethane insulation, injected under high pressure

Features

- Fitted with foot pedal and castors. Legs available as an option. Height-adjustable legs available as an option (125mm - 200mm).
- Removable guiding rails enable more convenient cleaning operations without any additional tools. Placing and adjusting the wire grids at the desired height is possible without using extra rails. Epoxy-coated wire grids, to improve protection, allow storage of different packaging types and have a maximum loading capacity of up to 40 kg.
- Removable pull-out/push-in magnetic door gasket to keep maximum hygiene and maintain the insulating properties.
- Heavy-duty stainless steel 50mm working top with 100mm high splash-back, preventing spillage behind the counter.
- Hinged doors with automatic return for a perfect closing that minimize temperature gain. Doors have a 120° dwell position and closes automatically at less than 90°. Door hinges are also reversible allowing the counter to be adapted on-site.
- Control panel and engine ventilation with pivoting front opening.
- Intuitive digital control allows temperature parameters to be adjusted easily and quickly.
- Luminous start-stop light button.
- Automatic evaporation of defrost water. Hot gas coming from the compressor is used to automatically evaporate defrost water, instead of by means of heating elements, achieving even less energy consumption and reducing in half defrost time.
- Equipped with 1 grid GN 1/1 per each door.
- Rounded edge interiors, easier cleaning operations to reduce potential dirt traps.

Contact

Website: www.sterlingpro.co.uk / **Phone:** 01264 560190 / **Email:** sales@sterlingpro.co.uk



Green Gastronorm Freezer Counters
SNI-7-135-20 / SNI-7-180-30 / SNI-7-225-40



2 YEARS
WARRANTY



2-3 DAY
DELIVERY



UK SERVICE
SUPPORT



MADE IN
THE EU



Specifications

Model	Doors	Upstand	Capacity Gross / Nett		Temperature	Energy Usage	Dimensions (mm) Width / Depth / Height			Energy Rating	Refrigerant	List Price
SNI-7-135-20	2	Yes	290 ltrs	143 ltrs	-18°C to -22°C	6.0 kW/hr	1342	700	850	D	R290a	£1,858
SNI-7-135-20-SP	2	No	290 ltrs	143 ltrs	-18°C to -22°C	6.0 kW/hr	1342	700	850	D	R290a	£1,858
SNI-7-180-30	3	Yes	452 ltrs	214 ltrs	-18°C to -22°C	6.8 kW/hr	1792	700	850	D	R290a	£2,198
SNI-7-180-30-SP	3	No	452 ltrs	214 ltrs	-18°C to -22°C	6.8 kW/hr	1792	700	850	D	R290a	£2,198
SNI-7-225-40	4	Yes	615 ltrs	285 ltrs	-18°C to -22°C	7.4 kW/hr	2242	700	850	D	R290a	£2,798
SNI-7-225-40-SP	4	No	615 ltrs	285 ltrs	-18°C to -22°C	7.4 kW/hr	2242	700	850	D	R290a	£2,798

Key Features

Power supply: 13 amp plug

Castors fitted as standard

Heavy-duty forced air system

Stainless Steel interior and exterior

Automatic defrost

Intelligent air-circulation system

Drawer options available

100mm upstand available at no extra cost

Green Gastronorm Freezer Counters

SNI-7-135-20 / SNI-7-180-30 / SNI-7-225-40



2 YEARS
WARRANTY



2-3 DAY
DELIVERY



UK SERVICE
SUPPORT



MADE IN
THE EU

Efficiency

- “Ventilation Grill” on the front panel keeping the cooling unit system ventilated and running more efficiently.
- Forced draft evaporator with anti-corrosion cover.
- Intelligent Air Circulation system ensures perfect temperature consistency with its innovative airflow design.
- 50 mm thickness, CFC-free, high-density (40 kg/m³) polyurethane insulation, injected under high pressure

Features

- Fitted with foot pedal and castors. Legs available as an option. Height-adjustable legs available as an option (125mm - 200mm).
- Removable guiding rails enable more convenient cleaning operations without any additional tools. Placing and adjusting the wire grids at the desired height is possible without using extra rails. Epoxy-coated wire grids, to improve protection, allow storage of different packaging types and have a maximum loading capacity of up to 40 kg.
- Removable pull-out/push-in magnetic door gasket to keep maximum hygiene and maintain the insulating properties.
- Heavy-duty stainless steel 50mm working top with 100mm high splash-back, preventing spillage behind the counter.
- Hinged doors with automatic return for a perfect closing that minimize temperature gain. Doors have a 120° dwell position and closes automatically at less than 90°. Door hinges are also reversible allowing the counter to be adapted on-site.
- Control panel and engine ventilation with pivoting front opening.
- Intuitive digital control allows temperature parameters to be adjusted easily and quickly.
- Luminous start-stop light button.
- Automatic evaporation of defrost water. Hot gas coming from the compressor is used to automatically evaporate defrost water, instead of by means of heating elements, achieving even less energy consumption and reducing in half defrost time.
- Equipped with 1 grid GN 1/1 per each door.
- Rounded edge interiors, easier cleaning operations to reduce potential dirt traps.

Contact

Website: www.sterlingpro.co.uk / **Phone:** 01264 560190 / **Email:** sales@sterlingpro.co.uk



Green Pizza Prep Counters SPIZ-135 & SPIZ-180



2 YEARS
WARRANTY



2-3 DAY
DELIVERY



UK SERVICE
SUPPORT



MADE IN
THE EU



Specifications

Model	Doors	Gross Capacity	GN Pans	Temperature	Electric Power	Dimensions (mm) Width / Depth / Height			Climate Class	Refrigerant	List Price
SPIZ-135	2	274 ltrs	GN1/4 x 8	-2°C to +8°C	223 kW	1342	700	1052	4	R290a	£1,938
SPIZ-180	3	428 ltrs	GN1/4 x 10	-2°C to +8°C	414 kW	1792	700	1052	4	R290a	£2,338

Key Features

Power supply: 13 amp plug

Hinged doors with automatic return

Stainless Steel interior and exterior

Forced draft evaporator

6 grid level positions for increased loading capacity

Lockable door with replacement gaskets

Intelligent air-circulation system

50mm high-density injected insulation

Green Pizza Prep Counters SPIZ-135 & SPIZ-180



2 YEARS
WARRANTY



2-3 DAY
DELIVERY



UK SERVICE
SUPPORT



MADE IN
THE EU

Efficiency

- “Ventilation Grill” on the front panel keeping the cooling unit system ventilated and running more efficiently.
- Forced draft evaporator with anti-corrosion cover.
- Intelligent Air Circulation system ensures perfect temperature consistency with its innovative airflow design.
- Door switch stops the fan when door is opened to avoid cold air exiting the interior, thus saving energy.
- 50 mm thickness, CFC-free, high-density (40 kg/m³) polyurethane insulation, injected under high pressure

Features

- Specially manufactured in high-quality Stainless Steel for intensive professional applications, featuring a very robust design and perfect finishing.
- Stainless Steel doors with ergonomic, full-length, robust, perfectly integrated handle that ensures practical opening of the door that avoids dust and dirt collection.
- Removable guiding rails enable more convenient cleaning operations without additional tools. Placing and adjusting the wire grids at the desired height is possible without using extra rails. Epoxy-coated wire grids, to improve protection, allow storage of different packaging types and have a maximum loading capacity of up to 40kg.
- Removable pull-out/ push-in magnetic door gasket to keep maximum hygiene and maintain the insulating properties.
- Stamped bottom panel with water drain especially designed to make cleaning operations quicker and easier, optimum for hygiene.
- Rounded edge interiors, easier cleaning operations to reduce potential dirt traps.
- 6 grid level positions for increased loading capacity, with a distance of 70mm among them.
- Automatic evaporation of defrost water. Hot gas coming from the compressor is used to automatically evaporate defrost water, instead of by means of heating elements, achieving even less energy consumption and reducing in half defrost time.
- Hinged doors with automatic return for a perfect closing that minimize temperature gain. Doors have a 120° dwell position and closes automatically at less than 90°. Door hinges are also reversible allowing the cabinet to be adapted on-site.
- Intuitive digital control allows temperature parameters to be adjusted easily and quickly.
- Luminous start-stop light button.

Contact

Website: www.sterlingpro.co.uk / **Phone:** 01264 560190 / **Email:** sales@sterlingpro.co.uk



Green Granite-Top Pizza Prep Counters
SPI-7-135-20-G / SPI-7-180-30-G / SPI-7-225-40-G



2 YEARS WARRANTY



2-3 DAY DELIVERY



UK SERVICE SUPPORT



MADE IN THE EU



Specifications

Model	Doors	Capacity Gross / Nett	Temperature	Energy Usage	Dimensions (mm) Width / Depth / Height	Energy Rating	Refrigerant	List Price
SPI-7-135-20-GR	2	290 ltrs / 143 ltrs	-2°C to +8°C	2.0 kW/hr	1342 / 700 / 1080	B	R290a	£1,998
SPI-7-180-30-GR	3	452 ltrs / 214 ltrs	-2°C to +8°C	2.6 kW/hr	1792 / 700 / 1080	C	R290a	£2,258
SPI-7-225-40-GR	4	615 ltrs / 285 ltrs	-2°C to +8°C	3.0 kW/hr	2242 / 700 / 1080	C	R290a	£2,798

Key Features

Power supply: 13 amp plug	Automatic defrost
Castors fitted as standard	Intelligent air-circulation system
Heavy-duty forced air system	Drawer options available
Stainless Steel interior and exterior	Heavy-duty granite work-top

Green Pizza Prep Counters

SPI-7-135-20-G / SPI-7-180-30-G / SPI-7-225-40-G



2 YEARS
WARRANTY



2-3 DAY
DELIVERY



UK SERVICE
SUPPORT



MADE IN
THE EU

Efficiency

- “Ventilation Grill” on the front panel keeping the cooling unit system ventilated and running more efficiently.
- Forced draft evaporator with anti-corrosion cover.
- Intelligent Air Circulation system ensures perfect temperature consistency with its innovative airflow design.
- 50 mm thickness, CFC-free, high-density (40 kg/m³) polyurethane insulation, injected under high pressure

Features

- Fitted with foot pedal and castors. Height adjustable Stainless Steel legs available as an option (125mm - 200mm).
- Removable guiding rails enable more convenient cleaning operations without any additional tools. Placing and adjusting the wire grids at the desired height is possible without using extra rails. Epoxy-coated wire grids, to improve protection, allow storage of different packaging types and have a maximum loading capacity of up to 40 kg.
- Removable pull-out/push-in magnetic door gasket to keep maximum hygiene and maintain the insulating properties.
- Heavy-duty 30mm granite work top with side splash-back from 150mm to 250mm high and rear splash-back of 250mm high, preventing spillage behind the counter.
- Hinged doors with automatic return for a perfect closing that minimize temperature gain. Doors have a 120° dwell position and closes automatically at less than 90°. Door hinges are also reversible allowing the counter to be adapted on-site.
- Control panel and engine ventilation with pivoting front opening.
- Intuitive digital control allows temperature parameters to be adjusted easily and quickly.
- Luminous start-stop light button.
- Automatic evaporation of defrost water. Hot gas coming from the compressor is used to automatically evaporate defrost water, instead of by means of heating elements, achieving even less energy consumption and reducing in half defrost time.
- Equipped with 1 grid GN 1/1 per each door.
- Rounded edge interiors, easier cleaning operations to reduce potential dirt traps.

Contact

Website: www.sterlingpro.co.uk / **Phone:** 01264 560190 / **Email:** sales@sterlingpro.co.uk



Green Single Door Fish Storage Cabinets SPIF700



2 YEARS
WARRANTY



2-3 DAY
DELIVERY



UK SERVICE
SUPPORT



MADE IN
THE EU



Specifications

Model	Type	Hinge	Gross Capacity	Drawers	Temperature	Dimensions (mm) Width / Depth / Height			Refrigerant	List Price
SPIF700R	Fridge	Right	171 ltrs	7	-1°C to -4°C	760	729	2005	R290a	£2,550
SPIF700L	Fridge	Left	171 ltrs	7	-1°C to -4°C	760	729	2005	R290a	£2,550

Key Features

Power supply: 13 amp plug

Castors fitted as standard

Drainage for each drawer

Hinged doors with automatic closing

Automatic defrost

Innovative airflow

Intuitive digital control

Removeable magnetic door gasket

Green Single Door Fish Storage Cabinets SPIF700



2 YEARS
WARRANTY



2-3 DAY
DELIVERY



UK SERVICE
SUPPORT



MADE IN
THE EU

Efficiency

- "Ventilation Grill" on the front panel keeping the cooling unit system ventilated and running more efficiently.
- Forced draft evaporator with anti-corrosion cover.
- Intelligent Air Circulation system ensures perfect temperature consistency with its innovative airflow design.
- Door switch stops the fan when door is opened to avoid cold air exiting the interior, thus saving energy.
- 50 mm thickness, CFC-free, high-density (40 kg/m³) polyurethane insulation, injected under high pressure

Features

- Castors fitted as standard. Height adjustable Stainless Steel legs available as an option (125mm - 200mm).
- Removable pull-out/ push-in magnetic door gasket to keep maximum hygiene and maintain the insulating properties.
- Equipped with 7 internal high capacity drawers 640x400x120mm for fish, made of sanitary PVC with a Stainless Steel perforated base.
- Rounded edge interiors, easier cleaning operations to reduce potential dirt traps.
- Individual drainage of each drawer to the general drainage system, removable for cleaning of the cabinet.
- Automatic evaporation of defrost water. Hot gas coming from the compressor is used to automatically evaporate defrost water, instead of by means of heating elements, achieving even less energy consumption and reducing in half defrost time.
- Intelligent air circulation system ensures perfect temperature consistency with its innovative airflow design, specially suitable to store refrigerated fish or seafood products.
- Hinged doors with automatic return for a perfect closing that minimize temperature gain. Doors have a 120° dwell position and closes automatically at less than 90°. Door hinges are also reversible allowing the cabinet to be adapted on-site.
- Specially designed to provide high humidity and constant temperature throughout all drawers.

Contact

Website: www.sterlingpro.co.uk / **Phone:** 01264 560190 / **Email:** sales@sterlingpro.co.uk



Green Single Door Cabinets SPI600 & SNI600



2 YEARS
WARRANTY



2-3 DAY
DELIVERY



UK SERVICE
SUPPORT



MADE IN
THE EU



Specifications

Model	Type	Hinge	Capacity Gross / Nett		Temperature	Annual Energy Consumption	Dimensions (mm) Width / Depth / Height			Energy Rating	Refrigerant	List Price
SPI600R	Fridge	Right	600 ltrs	386 ltrs	-2°C to +8°C	548 kWh	693	726	2067	C	R290a	£1,798
SPI600L	Fridge	Left	600 ltrs	386 ltrs	-2°C to +8°C	548 kWh	693	726	2067	C	R290a	£1,798
SNI600R	Freezer	Right	600 ltrs	386 ltrs	-18°C to -22°C	2179 kWh	693	726	2067	D	R290a	£1,958
SNI600L	Freezer	Left	600 ltrs	386 ltrs	-18°C to -22°C	2179 kWh	693	726	2067	D	R290a	£1,958

Key Features

Power supply: 13 amp plug

Hinged doors with automatic return

Stainless Steel interior and exterior

Forced draft evaporator

18 grid level positions for increased loading capacity

Lockable door with replacement gaskets

Intelligent air-circulation system

50mm high-density injected insulation

Green Single Door Cabinets

SPI600 & SNI600



2 YEARS
WARRANTY



2-3 DAY
DELIVERY



UK SERVICE
SUPPORT



MADE IN
THE EU

Efficiency

- "Ventilation Grill" on the front panel keeping the cooling unit system ventilated and running more efficiently.
- Forced draft evaporator with anti-corrosion cover.
- Intelligent Air Circulation system ensures perfect temperature consistency with its innovative airflow design.
- Door switch stops the fan when door is opened to avoid cold air exiting the interior, thus saving energy.
- 50 mm thickness, CFC-free, high-density (40 kg/m³) polyurethane insulation, injected under high pressure

Features

- Space saving design - only 726mm deep.
- Specially manufactured in high-quality Stainless Steel for intensive professional applications, featuring a very robust design and perfect finishing.
- Placing and adjusting the wire grids at the desired height is possible without using extra rails. Epoxy-coated wire grids, to improve protection, allow storage of different packaging types and have a maximum loading capacity of up to 40kg.
- Removable pull-out/ push-in magnetic door gasket to keep maximum hygiene and maintain the insulating properties.
- Stamped bottom panel with water drain especially designed to make cleaning operations quicker and easier, optimum for hygiene.
- Rounded edge interiors, easier cleaning operations to reduce potential dirt traps.
- 18 grid level positions for increased loading capacity, with a distance of 70mm between them.
- Automatic evaporation of defrost water. Hot gas from the compressor is used to automatically evaporate defrost water, instead of using a heating element, achieving even less energy consumption and reducing the defrosting time by half.
- Hinged doors with automatic return for a perfect closing that minimize temperature gain. Doors have a 120° dwell position and closes automatically at less than 90°. Door hinges are also reversible allowing the cabinet to be adapted on-site.
- Intuitive digital control allows temperature parameters to be adjusted easily and quickly.
- Luminous start-stop light button.

Contact

Website: www.sterlingpro.co.uk / **Phone:** 01264 560190 / **Email:** sales@sterlingpro.co.uk



Green Single Door Gastronorm Cabinets
SPI700 & SNI700



2 YEARS WARRANTY



2-3 DAY DELIVERY



UK SERVICE SUPPORT



MADE IN THE EU



Specifications

Model	Type	Hinge	Capacity Gross / Nett	Temperature	Energy Usage	Dimensions (mm) Width / Depth / Height	Energy Rating	Refrigerant	List Price
SPI700R	Fridge	Right	700 ltrs / 461 ltrs	-2°C to +8°C	1.5 kW/hr	653 / 842 / 2040	C	R290a	£1,698
SPI700L	Fridge	Left	700 ltrs / 461 ltrs	-2°C to +8°C	1.5 kW/hr	653 / 842 / 2040	C	R290a	£1,698
SNI700R	Freezer	Right	700 ltrs / 461 ltrs	-18°C to -22°C	5.97 kW/hr	653 / 842 / 2040	D	R290a	£1,958
SNI700L	Freezer	Left	700 ltrs / 461 ltrs	-18°C to -22°C	5.97 kW/hr	653 / 842 / 2040	D	R290a	£1,958

Key Features

Power supply: 13 amp plug

Castors fitted as standard

Stainless Steel interior and exterior

Shelf dimensions GN2/1

Automatic defrost

Lockable door with replacement gaskets

Intelligent air-circulation system

60mm high-density injected insulation

Green Single Door Gastronorm Cabinets

SPI700 & SNI700



2 YEARS
WARRANTY



2-3 DAY
DELIVERY



UK SERVICE
SUPPORT



MADE IN
THE EU

Efficiency

- “Ventilation Grill” on the front panel keeping the cooling unit system ventilated and running more efficiently.
- Forced draft evaporator with anti-corrosion cover.
- Intelligent Air Circulation system ensures perfect temperature consistency with its innovative airflow design.
- Door switch stops the fan when door is opened to avoid cold air exiting the interior, thus saving energy.
- 60 mm thickness, CFC-free, high-density (40 kg/m³) polyurethane insulation, injected under high pressure

Features

- Fitted with foot pedal and castors. Legs available as an option. Height-adjustable legs available as an option (125mm - 200mm).
- Stamped guides with rounded edges enable more convenient cleaning operations without any difficulties. Placing and adjusting the grids is also easier than ever. Plastic-coated wire grids allow storage of different packaging types and have a maximum loading capacity of up to 40 kg.
- Removable pull-out/ push-in magnetic door gasket to keep maximum hygiene and maintain the insulating properties.
- Stamped bottom panel with water drain especially designed to make cleaning operations quicker and easier, optimum for hygiene.
- Rounded edge interiors, easier cleaning operations to reduce potential dirt traps.
- 23 grid level positions for increased loading capacity, with a distance of 55mm between them.
- Automatic evaporation of defrost water. Hot gas from the compressor is used to automatically evaporate defrost water, instead of using a heating element, achieving even less energy consumption and reducing the defrosting time by half.
- Hinged doors with automatic return for a perfect closing that minimize temperature gain. Doors have a 120° dwell position and closes automatically at less than 90°. Door hinges are also reversible allowing the cabinet to be adapted on-site.
- Intuitive digital control allows temperature parameters to be adjusted easily and quickly.
- Luminous start-stop light button.

Contact

Website: www.sterlingpro.co.uk / **Phone:** 01264 560190 / **Email:** sales@sterlingpro.co.uk



Premium Single Door Storage Cabinets
XPI700 & XNI700



2 YEARS WARRANTY



2-3 DAY DELIVERY



UK SERVICE SUPPORT



MADE IN THE EU



Climate Class 5
High Ambient: 40°C

XNI700

XPI700

Specifications

Model	Type	Capacity Gross / Nett		Temperature	Energy Consumption	Dimensions (mm) Width / Depth / Height			Climate Class	Energy Rating	Refrigerant	List Price
XPI700	Fridge	700 ltrs	481 ltrs	-2°C to +8°C	333 kWh/yr	693	875	2119	5	A	R600a	£2,598
XNI700	Freezer	700 ltrs	481 ltrs	-18°C to -22°C	2231 kWh/yr	693	875	2119	5	D	R290a	£2,798

Key Features

- Power supply: 13 amp plug
- Stainless Steel doors with integrated handle
- Hinged doors (left or right) with automatic return
- 24 grid level positions for increased loading capacity
- 80mm thick (CFC-free) polyurethane insulation
- Extra large touch screen controller
- Forced draft evaporator with anti-corrosion cover
- Castors fitted as standard

Premium Single Door Storage Cabinets XPI700 & XNI700



2 YEARS
WARRANTY



2-3 DAY
DELIVERY



UK SERVICE
SUPPORT



MADE IN
THE EU

Additional Features

- Specially manufactured in high-quality Stainless Steel for intensive professional applications, featuring a very robust design and perfect finishing.
- 80mm thickness (CFC-free), high-density (40kg/m³) polyurethane insulation, injected under high pressure.
- Completely Stainless Steel made door with integrated handle and excellent finishing.
- Hinged doors with automatic return for a perfect closing that minimize temperature gain. Doors have a 120° dwell position and closes automatically at less than 90°. Door hinges are also reversible allowing the cabinet to be adapted on-site.
- Extra large touch screen controller with easily adjustable parameters, energy saving mode and HACCP alarm system.
- Low energy consumption LED lighting to display the interior of the cabinet.
- Intelligent air circulation system ensures perfect temperature consistency with its innovative airflow design.
- Door switch stops the fan when door is opened to avoid cold air exiting the interior, thus saving energy.
- Automatic evaporation of defrost water. Hot gas coming from the compressor is used to automatically evaporate defrost water, instead of by means of heating elements, achieving even less energy consumption.
- Stamped guides with rounded edges enable more convenient cleaning operations without any difficulties. Placing and adjusting the grids is also easier than ever. Plastic coated wire grids allow storage of different packaging types and have a maximum loading capacity of up to 40kg.
- Removable pull-out/push-in magnetic door gasket to keep maximum hygiene and maintain the insulating properties.
- Rounded edge interiors, easier cleaning operations to reduce potential dirt traps.




Contact

Website: www.sterlingpro.co.uk / **Phone:** 01264 560190 / **Email:** sales@sterlingpro.co.uk



Premium Range Cabinet Features

XPI700 / XNI700 / XPI142V / XNI142V



High efficiency components

Low energy compressors, large area evaporators and high performing electronic fans that minimize temperature gains, reducing energy consumption.



Integrated Stainless Steel handle

Ergonomic, Stainless Steel made, robust, perfectly integrated handle ensures practical opening of the door that avoids dust and dirt collection and is extremely easy to clean.



Insulation - 80mm thickness

80mm thickness CFC-free, high-density (40kg/m³) polyurethane insulation, guarantees exceptional, long-term insulation and energy savings in all Vantage cabinets.



Intelligent air circulation system

Perfect temperature consistency with its innovative airflow design that encircles the food and ensures its proper conservation.



Rounded edge interior

Easier cleaning operations to reduce potential dirt traps and optimum hygiene.



Removable door gasket


Removable pull-out/push-in magnetic door gasket to keep maximum hygiene and maintain the insulating properties.



Maximum energy savings

The XPI700 refrigerator achieves the highest A Rating under the conditions defined in climate class 5, ensuring the maximum energy savings.

*The label complies with the delegated regulation (UE) 2015/1094 of the commission of 5th May 2015



Compact controller

Extra large, screen touch controller with energy saving strategy and HACCP alarm system, which allows an easy temperature parameter adjustment ensuring the best food preservation. It also offers a Bluetooth data logger as an option.




Automatic evaporation of defrost water

Hot gas coming from the compressor is used to automatically evaporate defrost water, instead of by means of heating elements, achieving even less energy consumption.



Stamped guides, sturdy wire grids

Stamped guides with rounded edges enable more convenient cleaning operations without any difficulties. Plastic coated wire grids allow storage of different packaging types and have a maximum loading capacity of up to 40kg.



Internal LED lighting

Low energy consumption LED lighting to display the interior, standard in all Vantage upright models.



Self closing hinged doors

Hinged doors with automatic return for a perfect closing that minimize temperature gain and reduces energy consumption. Doors have a 120° dwell position and closes automatically at less than 90°. Door hinges are also reversible.





Green Double Door Cabinets
SPI122 & SNI122



2 YEARS
WARRANTY



2-3 DAY
DELIVERY



UK SERVICE
SUPPORT



MADE IN
THE EU



Specifications

Model	Type	Capacity Gross / Nett		Temperature	Annual Energy Consumption	Dimensions (mm) Width / Depth / Height			Energy Rating	Refrigerant	List Price
SPI122	Fridge	1200 ltrs	868 ltrs	-2°C to +8°C	975 kWh	1388	726	2067	C	R290a	£2,458
SNI122	Freezer	1200 ltrs	868 ltrs	-18°C to -22°C	4855 kWh	1388	726	2067	E	R290a	£2,850

Key Features

Power supply: 13 amp plug

Hinged doors with automatic return

Stainless Steel interior and exterior

Forced draft evaporator

18 grid level positions for increased loading capacity

Lockable door with replacement gaskets

Intelligent air-circulation system

50mm high-density injected insulation

Green Double Door Cabinets SPI122 & SNI122



2 YEARS
WARRANTY



2-3 DAY
DELIVERY



UK SERVICE
SUPPORT



MADE IN
THE EU

Efficiency

- Ventilation Grill on the front panel keeping the cooling unit system ventilated and running more efficiently.
- Forced draft evaporator with anti-corrosion cover.
- Intelligent Air Circulation system ensures perfect temperature consistency with its innovative airflow design.
- Door switch stops the fan when door is opened to avoid cold air exiting the interior, thus saving energy.
- 50 mm thickness, CFC-free, high-density (40 kg/m³) polyurethane insulation, injected under high pressure

Features

- Space saving design - only 726mm deep.
- Specially manufactured in high-quality Stainless Steel for intensive professional applications, featuring a very robust design and perfect finishing.
- Placing and adjusting the wire grids at the desired height is possible without using extra rails. Epoxy-coated wire grids, to improve protection, allow storage of different packaging types and have a maximum loading capacity of up to 40kg.
- Removable pull-out/ push-in magnetic door gasket to keep maximum hygiene and maintain the insulating properties.
- Stamped bottom panel with water drain especially designed to make cleaning operations quicker and easier, optimum for hygiene.
- Rounded edge interiors, easier cleaning operations to reduce potential dirt traps.
- 18 grid level positions for increased loading capacity, with a distance of 70mm between them.
- Automatic evaporation of defrost water. Hot gas from the compressor is used to automatically evaporate defrost water, instead of using a heating element, achieving even less energy consumption and reducing the defrosting time by half.
- Hinged doors with automatic return for a perfect closing that minimize temperature gain. Doors have a 120° dwell position and closes automatically at less than 90°. Door hinges are also reversible allowing the cabinet to be adapted on-site.
- Intuitive digital control allows temperature parameters to be adjusted easily and quickly.
- Luminous start-stop light button.

Contact

Website: www.sterlingpro.co.uk / **Phone:** 01264 560190 / **Email:** sales@sterlingpro.co.uk



Green Double Door Gastronorm Cabinets
SPI142 & SNI142



2 YEARS
WARRANTY



2-3 DAY
DELIVERY



UK SERVICE
SUPPORT



MADE IN
THE EU



Specifications

Model	Type	Capacity Gross / Nett		Temperature	Energy Usage	Dimensions (mm) Width / Depth / Height			Energy Rating	Refrigerant	List Price
SPI142	Fridge	1400 ltrs	922 ltrs	-2°C to +8°C	2.5 kW/hr	1318	842	2040	C	R290a	£2,398
SNI142	Freezer	1400 ltrs	922 ltrs	-18°C to -22°C	11.4 kW/hr	1318	842	2040	E	R290a	£2,798

Key Features

Power supply: 13 amp plug	Automatic defrost
Castors fitted as standard	Lockable door with replacement gaskets
Stainless Steel interior and exterior	Intelligent air-circulation system
Shelf dimensions GN2/1	60mm high-density injected insulation

Green Double Door Gastronorm Cabinets SPI142 & SNI142



2 YEARS
WARRANTY



2-3 DAY
DELIVERY



UK SERVICE
SUPPORT



MADE IN
THE EU

Efficiency

- "Ventilation Grill" on the front panel keeping the cooling unit system ventilated and running more efficiently.
- Forced draft evaporator with anti-corrosion cover.
- Intelligent Air Circulation system ensures perfect temperature consistency with its innovative airflow design.
- Door switch stops the fan when door is opened to avoid cold air exiting the interior, thus saving energy.
- 60 mm thickness, CFC-free, high-density (40 kg/m³) polyurethane insulation, injected under high pressure

Features

- Fitted with foot pedal and castors. Legs available as an option. Height-adjustable legs available as an option (125mm - 200mm).
- Stamped guides with rounded edges enable more convenient cleaning operations without any difficulties. Placing and adjusting the grids is also easier than ever. Plastic-coated wire grids allow storage of different packaging types and have a maximum loading capacity of up to 40 kg.
- Removable pull-out/ push-in magnetic door gasket to keep maximum hygiene and maintain the insulating properties.
- Stamped bottom panel with water drain especially designed to make cleaning operations quicker and easier, optimum for hygiene.
- Rounded edge interiors, easier cleaning operations to reduce potential dirt traps.
- 23 grid level positions for increased loading capacity, with a distance of 55mm between them.
- Automatic evaporation of defrost water. Hot gas from the compressor is used to automatically evaporate defrost water, instead of using a heating element, achieving even less energy consumption and reducing the defrosting time by half.
- Hinged doors with automatic return for a perfect closing that minimize temperature gain. Doors have a 120° dwell position and closes automatically at less than 90°. Door hinges are also reversible allowing the cabinet to be adapted on-site.
- Intuitive digital control allows temperature parameters to be adjusted easily and quickly.
- Luminous start-stop light button.

Contact

Website: www.sterlingpro.co.uk / **Phone:** 01264 560190 / **Email:** sales@sterlingpro.co.uk



Premium Double Door Storage Cabinets
XPI142V & XNI142V



Specifications

Model	Type	Capacity Gross / Nett	Temperature	Energy Consumption	Dimensions (mm) Width / Depth / Height	Climate Class	Energy Rating	Refrigerant	List Price
XPI142V	Fridge	1400 ltrs / 962 ltrs	-2°C to +8°C	829 kWh/yr	1358 / 875 / 2119	5	C	R600a	£3,698
XNI142V	Freezer	1400 ltrs / 962 ltrs	-18°C to -22°C	4482 kWh/yr	1358 / 875 / 2119	5	D	R290a	£4,498

Key Features

- Power supply: 13 amp plug
- Stainless Steel doors with integrated handle
- Hinged doors (left or right) with automatic return
- 24 grid level positions for increased loading capacity
- 80mm thick (CFC-free) polyurethane insulation
- Extra large touch screen controller
- Forced draft evaporator with anti-corrosion cover
- Castors fitted as standard

Premium Double Door Storage Cabinets XPI142V & XNI142V



2 YEARS
WARRANTY



2-3 DAY
DELIVERY



UK SERVICE
SUPPORT



MADE IN
THE EU

Additional Features

- Specially manufactured in high-quality Stainless Steel for intensive professional applications, featuring a very robust design and perfect finishing.
- 80mm thickness (CFC-free), high-density (40kg/m³) polyurethane insulation, injected under high pressure.
- Completely Stainless Steel made door with integrated handle and excellent finishing.
- Hinged doors with automatic return for a perfect closing that minimize temperature gain. Doors have a 120° dwell position and closes automatically at less than 90°. Door hinges are also reversible allowing the cabinet to be adapted on-site.
- Extra large touch screen controller with easily adjustable parameters, energy saving mode and HACCP alarm system.
- Low energy consumption LED lighting to display the interior of the cabinet.
- Intelligent air circulation system ensures perfect temperature consistency with its innovative airflow design.
- Door switch stops the fan when door is opened to avoid cold air exiting the interior, thus saving energy.
- Automatic evaporation of defrost water. Hot gas coming from the compressor is used to automatically evaporate defrost water, instead of by means of heating elements, achieving even less energy consumption.
- Stamped guides with rounded edges enable more convenient cleaning operations without any difficulties. Placing and adjusting the grids is also easier than ever. Plastic coated wire grids allow storage of different packaging types and have a maximum loading capacity of up to 40kg.
- Removable pull-out/push-in magnetic door gasket to keep maximum hygiene and maintain the insulating properties.
- Rounded edge interiors, easier cleaning operations to reduce potential dirt traps.




Contact

Website: www.sterlingpro.co.uk / **Phone:** 01264 560190 / **Email:** sales@sterlingpro.co.uk



Premium Range Cabinet Features

XPI700 / XNI700 / XPI142V / XNI142V




High efficiency components

Low energy compressors, large area evaporators and high performing electronic fans that minimize temperature gains, reducing energy consumption.



Integrated Stainless Steel handle

Ergonomic, Stainless Steel made, robust, perfectly integrated handle ensures practical opening of the door that avoids dust and dirt collection and is extremely easy to clean.



Insulation - 80mm thickness

80mm thickness CFC-free, high-density (40kg/m³) polyurethane insulation, guarantees exceptional, long-term insulation and energy savings in all Vantage cabinets.



Intelligent air circulation system

Perfect temperature consistency with its innovative airflow design that encircles the food and ensures its proper conservation.



Rounded edge interior

Easier cleaning operations to reduce potential dirt traps and optimum hygiene.



Removable door gasket


Removable pull-out/push-in magnetic door gasket to keep maximum hygiene and maintain the insulating properties.



Maximum energy savings

The XPI700 refrigerator achieves the highest A Rating under the conditions defined in climate class 5, ensuring the maximum energy savings.

*The label complies with the delegated regulation (UE) 2015/1094 of the commission of 5th May 2015



Compact controller

Extra large, screen touch controller with energy saving strategy and HACCP alarm system, which allows an easy temperature parameter adjustment ensuring the best food preservation. It also offers a Bluetooth data logger as an option.




Automatic evaporation of defrost water

Hot gas coming from the compressor is used to automatically evaporate defrost water, instead of by means of heating elements, achieving even less energy consumption.



Stamped guides, sturdy wire grids

Stamped guides with rounded edges enable more convenient cleaning operations without any difficulties. Plastic coated wire grids allow storage of different packaging types and have a maximum loading capacity of up to 40kg.



Internal LED lighting

Low energy consumption LED lighting to display the interior, standard in all Vantage upright models.



Self closing hinged doors

Hinged doors with automatic return for a perfect closing that minimize temperature gain and reduces energy consumption. Doors have a 120° dwell position and closes automatically at less than 90°. Door hinges are also reversible.





Green Triple Mode Chest Freezers
SPC465 & SPC570



2 YEARS
WARRANTY



2-3 DAY
DELIVERY



UK SERVICE
SUPPORT



SPC465

SPC570



Fridge mode:
+4°C to +6°C

Perfect for standard
food and drink storage



Chiller mode:
-1°C to +1°C

Perfect for meat storage -
hanger included for hung meat



Freezer mode:
-18°C to -24°C

The factory set default for this range -
performs as a traditional chest freezer

Specifications

Model	Capacity Gross / Nett		Daily Energy Consumption	Annual Energy Consumption	Dimensions (mm) Width / Depth / Height			Energy Rating	Refrigerant	List Price
SPC465	469 ltrs	459 ltrs	0.96 kWh/24hr	350 kWh/year	1492	742.5	840	A+	R600a	£658
SPC570	572 ltrs	561 ltrs	1.1 kWh/24hr	402 kWh/year	1775	742.5	840	A+	R600a	£778

Key Features

Power supply: 13 amp plug

x3 switchable temperature functions

White exterior

Aluminium embossed interior body

Internal LED lighting

Cut-off power function

Mechanical thermostat control

Baskets supplied: x2 - SPC465 / x3 - SPC570



Green Single Door Bottle Coolers
SP1HC



1 YEAR
WARRANTY



NEXT DAY
DELIVERY



UK SERVICE
SUPPORT



Specifications

Model	Colour	Door Type	Bottle Capacity	Nett Capacity	Temperature	Dimensions (mm) Width / Depth / Height			Refrigerant	List Price
SP1HC-BK	Black	Hinged	106 x 330ml	120 ltrs	+2°C to +12°C	600	520	900	R600a	£498
SP1HC-GR	Grey	Hinged	106 x 330ml	120 ltrs	+2°C to +12°C	600	520	900	R600a	£498

Key Features

Power supply: 13 amp plug	Internal LED lighting
x2 adjustable shelves	Electronic controller
Fan assisted for rapid cool down	Timed defrost
Self-closing doors	Fitted locks



Green Double Door Bottle Coolers

SP2HC



1 YEAR
WARRANTY



NEXT DAY
DELIVERY



UK SERVICE
SUPPORT



SP2HC-GH

SP2HC-BH

Specifications

Model	Colour	Door Type	Bottle Capacity	Nett Capacity	Temperature	Dimensions (mm) Width / Depth / Height			Refrigerant	List Price
SP2HC-BH	Black	Hinged	180 x 330ml	192 ltrs	+2°C to +12°C	900	520	900	R600a	£650
SP2HC-BS	Black	Sliding	180 x 330ml	192 ltrs	+2°C to +12°C	900	520	900	R600a	£650
SP2HC-GH	Grey	Hinged	180 x 330ml	192 ltrs	+2°C to +12°C	900	520	900	R600a	£650
SP2HC-GS	Grey	Sliding	180 x 330ml	192 ltrs	+2°C to +12°C	900	520	900	R600a	£650

Key Features

Power supply: 13 amp plug

x4 adjustable shelves

Fan assisted for rapid cool down

Self-closing doors

Internal LED lighting

Electronic controller

Timed defrost

Fitted locks



Green Triple Door Bottle Coolers
SP3HC



1 YEAR WARRANTY



NEXT DAY DELIVERY



UK SERVICE SUPPORT



SP3HC-GS

SP3HC-BH

Specifications

Model	Colour	Door Type	Bottle Capacity	Nett Capacity	Temperature	Dimensions (mm) Width / Depth / Height			Refrigerant	List Price
SP3HC-BH	Black	Hinged	274 x 330ml	300 ltrs	+2°C to +12°C	1350	520	900	R600a	£798
SP3HC-BS	Black	Sliding	274 x 330ml	300 ltrs	+2°C to +12°C	1350	520	900	R600a	£798
SP3HC-GH	Grey	Hinged	274 x 330ml	300 ltrs	+2°C to +12°C	1350	520	900	R600a	£798
SP3HC-GS	Grey	Sliding	274 x 330ml	300 ltrs	+2°C to +12°C	1350	520	900	R600a	£798

Key Features

Power supply: 13 amp plug	Internal LED lighting
x6 adjustable shelves	Electronic controller
Fan assisted for rapid cool down	Timed defrost
Self-closing doors	Fitted locks



Green Single Door Upright Display Chiller
SPG385



2 YEARS
WARRANTY



2-3 DAY
DELIVERY



UK SERVICE
SUPPORT



Specifications

Model	Capacity Gross / Nett		Can Capacity	Temperature	Energy Consumption	Dimensions (mm) Width / Depth / Height			Climate Class	Refrigerant	List Price
SPG385	379 ltrs	368 ltrs	406 x 330ml	+1°C to +10°C	2.7 kWh/24h	595	605	1832	4	R600a	£658

Key Features

Power supply: 13 amp plug

Body colour: White outside and inside

Black plastic door frame

Double-glazed tempered glass

Mechanical controls

Inner LED lighting

Shelf quantity: x5 PVC coated wire shelves

Hinged door with lock

Reversible door (without lock)

Perfect for displaying chilled drinks and snacks



Green Double Door Upright Display Chillers
SPD20HG & SPD20SL




2 YEARS
WARRANTY



2-3 DAY
DELIVERY



UK SERVICE
SUPPORT

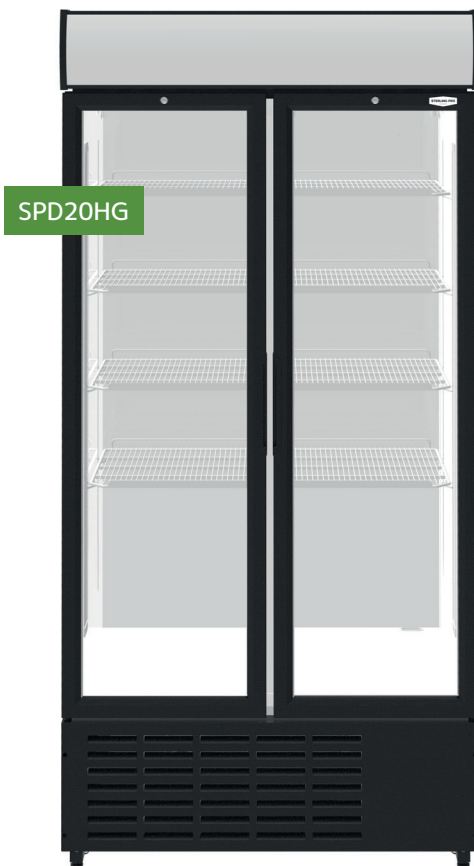

Specifications

Model	Door Type	Can Capacity	Capacity Gross / Nett		Temperature	Energy Consumption	Dimensions (mm) Width / Depth / Height			Climate Class	Refrigerant	List Price
SPD20HG	Hinged	1001 x 330ml	832 ltrs	805 ltrs	+1°C to +10°C	5.0 kWh/24h	980	740	2145	4	R290a	£1,538
SPD20SL	Sliding	1001 x 330ml	832 ltrs	805 ltrs	+1°C to +10°C	5.2 kWh/24h	980	740	2145	4	R290a	£1,538

Key Features

Power supply: 13 amp plug

Body colour: White outside and inside

Black plastic door frame

Double-glazed tempered glass

Mechanical controls

Inner LED lighting

Shelf quantity: x4 PVC coated wire shelves

Curved canopy



Standard Single Door Upright Display Chiller D372L



1 YEAR
WARRANTY



NEXT DAY
DELIVERY



UK SERVICE
SUPPORT



Specifications

Model	Capacity Gross / Nett		Temperature	Max Ambient	Dimensions (mm) Width / Depth / Height			Refrigerant	List Price
D372L	382 ltrs	334 ltrs	0°C to +10°C	+32°C	600	621	1863	R134a	£658

Key Features

Power supply: 13 amp plug

Fan assisted cooling

Fluorescent interior lighting with switch

Adjustable temperature thermostat

x5 adjustable shelves

Double glazed door

Self-closing door

Fan switch



Green Single Door Upright Display Freezer
BBVF372-HC



1 YEAR
WARRANTY



2-3 DAY
DELIVERY



UK SERVICE
SUPPORT



Specifications

Model	Capacity Gross / Nett		Shelves	Temperature	Dimensions (mm) Width / Depth / Height			Refrigerant	List Price
BBVF372-HC	382 ltrs	334 ltrs	x5	-18°C to -24°C	640	674	2056	R290a	£1,198

Features

Fluorescent internal lighting with switch

Adjustable temperature thermostat

Illuminated canopy

Double glazed door

Fluorescent internal lighting with switch

Self-closing door

Static cooling

13 amp plug



EVO Patisserie Counters
EVO60 / EVO90 / EVO120 / EVO150



2 YEAR
WARRANTY



NEXT DAY
DELIVERY



UK SERVICE
SUPPORT



MADE IN
THE EU



EVO60-SS



EVO120-BLACK

Specifications

Model	Finish	Deck Area	Temperature	Max Ambient	Dimensions (mm) Width / Depth / Height			Refrigerant	List Price
EVO60-BLACK	Black	0.94m ²	+3°C to +5°C	+25°C	680	785	1400	R452a	£2,398
EVO90-BLACK	Black	1.41m ²	+3°C to +5°C	+25°C	930	785	1400	R452a	£2,598
EVO120-BLACK	Black	1.88m ²	+3°C to +5°C	+25°C	1280	785	1400	R452a	£3,098
EVO150-BLACK	Black	2.34m ²	+3°C to +5°C	+25°C	1580	785	1400	R452a	£3,398
EVO60-SS	Stainless Steel	0.94m ²	+3°C to +5°C	+25°C	680	785	1400	R452a	£2,598
EVO90-SS	Stainless Steel	1.41m ²	+3°C to +5°C	+25°C	930	785	1400	R452a	£2,898
EVO120-SS	Stainless Steel	1.88m ²	+3°C to +5°C	+25°C	1280	785	1400	R452a	£3,450
EVO150-SS	Stainless Steel	2.34m ²	+3°C to +5°C	+25°C	1580	785	1400	R452a	£3,798

Features

13 amp plug

Fluorescent internal lighting with switch

Adjustable temperature thermostat

Illuminated canopy

Double glazed door

Self-closing door

x6 stationary shelves

Static cooling



Square EVO Patisserie Counters EVO-K 90 / EVO-K 120 / EVO-K 150 / EVO-K 180



2 YEAR
WARRANTY



NEXT DAY
DELIVERY



UK SERVICE
SUPPORT



MADE IN
THE EU



EVO-K-90-BLACK



EVO-K-120-BLACK

Specifications

Model	Finish	Deck Area	Temperature	Max Ambient	Dimensions (mm) Width / Depth / Height			Refrigerant	List Price
EVO-K 90-BLACK	Black	1.41m ²	+3°C to +5°C	+25°C	900	785	1400	R452a	£2,598
EVO-K 120-BLACK	Black	1.88m ²	+3°C to +5°C	+25°C	1200	785	1400	R452a	£3,098
EVO-K 150-BLACK	Black	2.34m ²	+3°C to +5°C	+25°C	1500	785	1400	R452a	£3,398
EVO-K 180-BLACK	Black	2.88m ²	+3°C to +5°C	+25°C	1800	785	1400	R452a	£4,298

Features

13 amp plug

Stainless Steel deck

x3 refrigerated glass shelves

Sliding rear door

Tempered square front glass

Fold-open front glass

Neon lighting for each shelf

Automatic defrost



EVO-SELF Self Service Counters
EVO-SELF-90 / 120 / 150 / 180 / 240



Specifications

Model	Finish	Shelves	Temperature	Max Ambient	Dimensions (mm) Width / Depth / Height			Refrigerant	List Price
EVO-SELF-90-BLK	Black	3	+3°C to +5°C	+25°C	900	780	1510	R452a	£2,998
EVO-SELF-120-BLK	Black	3	+3°C to +5°C	+25°C	1200	780	1510	R452a	£3,578
EVO-SELF-150-BLK	Black	3	+3°C to +5°C	+25°C	1500	780	1510	R452a	£3,898
EVO-SELF-180-BLK	Black	3	+3°C to +5°C	+25°C	1800	780	1510	R452a	£4,800
EVO-SELF-240-BLK	Black	3	+3°C to +5°C	+25°C	2400	780	1510	R452a	£6,584
EVO-SELF-90-SS	Stainless Steel	3	+3°C to +5°C	+25°C	900	780	1510	R452a	£2,898
EVO-SELF-120-SS	Stainless Steel	3	+3°C to +5°C	+25°C	1200	780	1510	R452a	£3,398
EVO-SELF-150-SS	Stainless Steel	3	+3°C to +5°C	+25°C	1500	780	1510	R452a	£3,698
EVO-SELF-180-SS	Stainless Steel	3	+3°C to +5°C	+25°C	1800	780	1510	R452a	£4,500
EVO-SELF-240-SS	Stainless Steel	3	+3°C to +5°C	+25°C	2400	780	1510	R452a	£6,198

Features

13 amp plug	Perforated wall for excellent airflow
Self-service	Stainless Steel shelves and deck
Glass side walls	Electronic defrost
Electronic timed defrosting	Perfect for stocking baked goods



SALINA Serveovers

SALINA80/100 / 150 / 200 / 250 / 300



2 YEAR
WARRANTY



NEXT DAY
DELIVERY



UK SERVICE
SUPPORT



MADE IN
THE EU



Specifications

Model	Glass Style	Deck Area	Storage Doors	Temperature	Max Ambient	Dimensions (mm) Width / Depth / Height			Refrigerant	List Price
SALINA80/100VCC	Curved	0.60m ²	1	+3°C to +5°C	+25°C	1040	900	1292	R452a	£1,998
SALINA80/150VCC	Curved	0.83m ²	2	+3°C to +5°C	+25°C	1520	900	1292	R452a	£2,198
SALINA80/200VCC	Curved	1.10m ²	2	+3°C to +5°C	+25°C	2000	900	1292	R452a	£2,498
SALINA80/250VCC	Curved	1.38m ²	3	+3°C to +5°C	+25°C	2480	900	1292	R452a	£2,898
SALINA80/300VCC	Curved	1.66m ²	3	+3°C to +5°C	+25°C	2960	900	1292	R452a	£3,598
SALINA80/100VD	Flat	0.60m ²	1	+3°C to +5°C	+25°C	1040	900	1262	R452a	£1,998
SALINA80/150VD	Flat	0.83m ²	2	+3°C to +5°C	+25°C	1520	900	1262	R452a	£2,198
SALINA80/200VD	Flat	1.10m ²	2	+3°C to +5°C	+25°C	2000	900	1262	R452a	£2,498
SALINA80/250VD	Flat	1.38m ²	3	+3°C to +5°C	+25°C	2480	900	1262	R452a	£2,898
SALINA80/300VD	Flat	1.66m ²	3	+3°C to +5°C	+25°C	2960	900	1262	R452a	£3,598

Features

13 amp plug

Independent refrigerated under-storage

Ambient internal display shelf

Choice of flat or curved glass

Electronic timed defrosting

Neon lighting

Slimline - only 900mm deep

Low energy consumption



KIBUK Serveovers
KIBUK100 / 150 / 200 / 250 / 300



2 YEAR
WARRANTY




NEXT DAY
DELIVERY



UK SERVICE
SUPPORT



MADE IN
THE EU

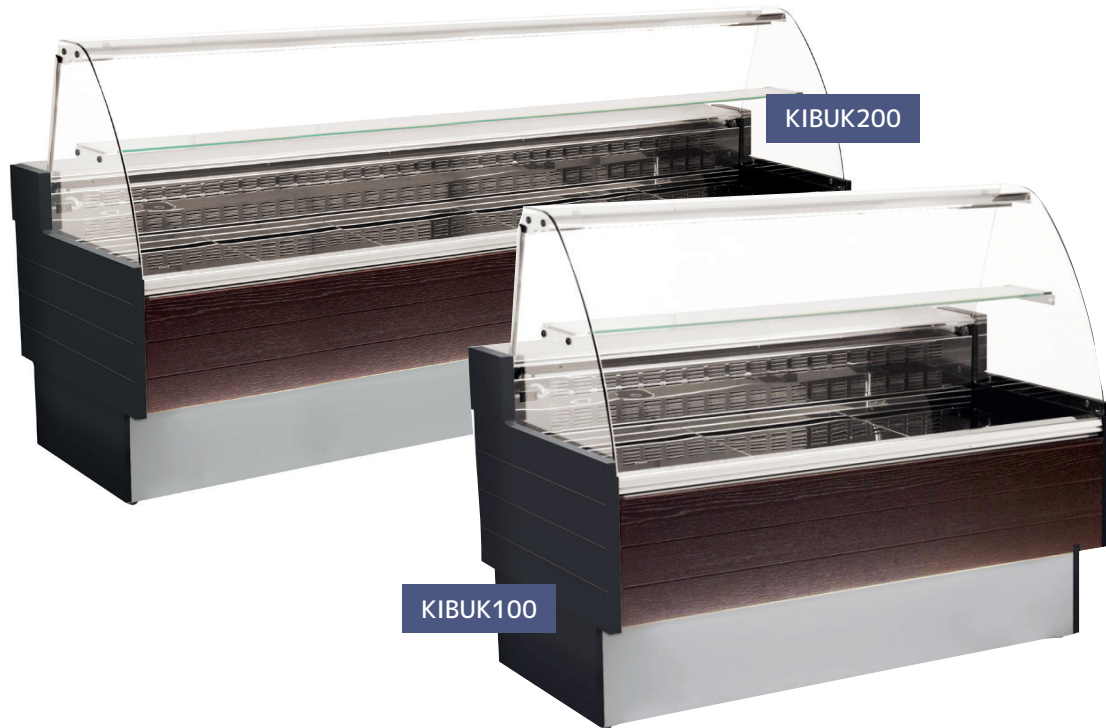

Specifications

Model	Deck Area	Temperature	Max Ambient	Dimensions (mm) Width / Depth / Height			Refrigerant	List Price
KIBUK100	0.6m ²	+3°C to +5°C	+25°C	1040	900	1262	R452a	£2,798
KIBUK150	0.83m ²	+3°C to +5°C	+25°C	1520	900	1262	R452a	£2,998
KIBUK200	1.1m ²	+3°C to +5°C	+25°C	2000	900	1262	R452a	£3,498
KIBUK250	1.38m ²	+3°C to +5°C	+25°C	2480	900	1262	R452a	£4,398
KIBUK300	3.86m ²	+3°C to +5°C	+25°C	2960	900	1262	R452a	£5,198

Features

13 amp plug	Manual condensate tray
Stainless Steel display deck	Refrigerated under-storage
Wooden side walls	Electronic controls
Automatic defrost	Curved glass



RIVO Serveovers
RIVO100 / 140 / 200 / 280



Specifications

Model	Deck Area	Temperature	Max Ambient	Dimensions (mm) Width / Depth / Height			Refrigerant	List Price
RIVO100	1.48m ²	+3°C to +5°C	+25°C	1030	876	1432	R452a	£2,598
RIVO140	1.79m ²	+3°C to +5°C	+25°C	1435	876	1432	R452a	£2,898
RIVO200	2.67m ²	+3°C to +5°C	+25°C	1910	876	1432	R452a	£3,598
RIVO280	3.86m ²	+3°C to +5°C	+25°C	2790	876	1432	R452a	£4,898

Features

13 amp plug	3 glass shelves (lower shelf refrigerated)
Slide-out display deck for easy loading	Scratch-resistant laminated serving shelf
Stainless Steel deck	Automatic defrost
Anti-mist front glass	Low energy consumption



VOLCANO Multideck Display Chillers
VOLCANO80/100 / 125 / 150 / 187



2 YEAR
WARRANTY



2-3 DAY
DELIVERY



UK SERVICE
SUPPORT



MADE IN
THE EU



Specifications

Model	Capacity	Temperature	Max Ambient	Dimensions (mm) Width / Depth / Height			Refrigerant	List Price
VOLCANO80/100	4 shelves	+3°C to +5°C	+25°C	1080	810	2040	R452a	£2,698
VOLCANO80/125	4 shelves	+3°C to +5°C	+25°C	1330	810	2040	R452a	£2,898
VOLCANO80/150	4 shelves	+3°C to +5°C	+25°C	1580	810	2040	R452a	£3,298
VOLCANO80/187	4 shelves	+3°C to +5°C	+25°C	1955	810	2040	R452a	£3,678

Features

13 amp plug

Compact design - only 800mm deep

White exterior

x4 painted steel shelves

Nightblind included

Automatic defrost

Ticket rails as standard

Ventilated cooling